



TECHNICAL DATA SHEET

MODEL UP270FE UPRIGHT FREEZER



Consistent freezing performance to safeguard valuable laboratory samples.

2.4 °C	133 Minutes	25 Minutes
------------------	-----------------------	----------------------

Temp. Uniformity

Pull-Down to -40°C

1-Minute Door Opening Recovery

Typical freezer data based in internal testing with freezer setpoint at -40°C and ambient temperature at 22°C.

SPECIFICATIONS

→ -20 to -40°C Freezer

Model	UP270FE
Capacity	270L (9.53 cuft)
Internal Chamber Size (W X D X H)	500 X 460 X 1235mm (19.69 X 18.11 X 48.62 in)
External Size (W X D X H)	700 X 640 X 1792mm (27.56 X 25.2 X 70.55 in)
Package Size (W X D X H)	835 X 775 X 1910mm (32.9 X 30.5 X 75.2 in)
Product Weight (Kgs/Lbs)	98kg (216.05 lbs)
Shipping Weight (Kgs/Lbs)	115kg (253.53 lbs)

→ Performance

Temperature Range	-20 to -40°C
Ambient Temperature	16-32°C
Climate Class	Indoor Use Only
Controller	Microprocessor
Display	Digital Display

→ Refrigeration

Compressor	Single
Cooling Method	Direct Cooling
Defrost Mode	Manual
Refrigerant	R290
Insulation Thickness (mm)	D:90, L/R:100, B:100

→ Construction

External Material	Powder Coated Steel
Inner Material	Painted Aluminum Plate
Drawers	7 (ABS material)
Access Test Port	1 pc. 025mm
Casters	2 (2 Leveling Feet)
Data Logging/Interval/Recording Time	USB/Record every 10 minutes/100,000 data
Interface	Remote Alarm Contact, RS485
Backup Battery	Yes

→ Alarms

Temperature	High/Low Temperature, High Ambient Temperature
Electrical	Power Failure, Low Battery, Data Logger Failure
System	Sensor Error, Door Ajar, Data Communication Failure

→ Electrical


220-240V/50Hz
4.22A

→ Certifications

UL (2021-09-25; 2023-01-31 (A1) - E509170)
CE (AHES2106001773HSA01)

Manufacturing Facility certified to ISO 9001:2015 and
ISO 13485:2016 quality management system standards
Medical device classification: Class II (U.S), Class IIa (EU MDR)

DIMENSIONS

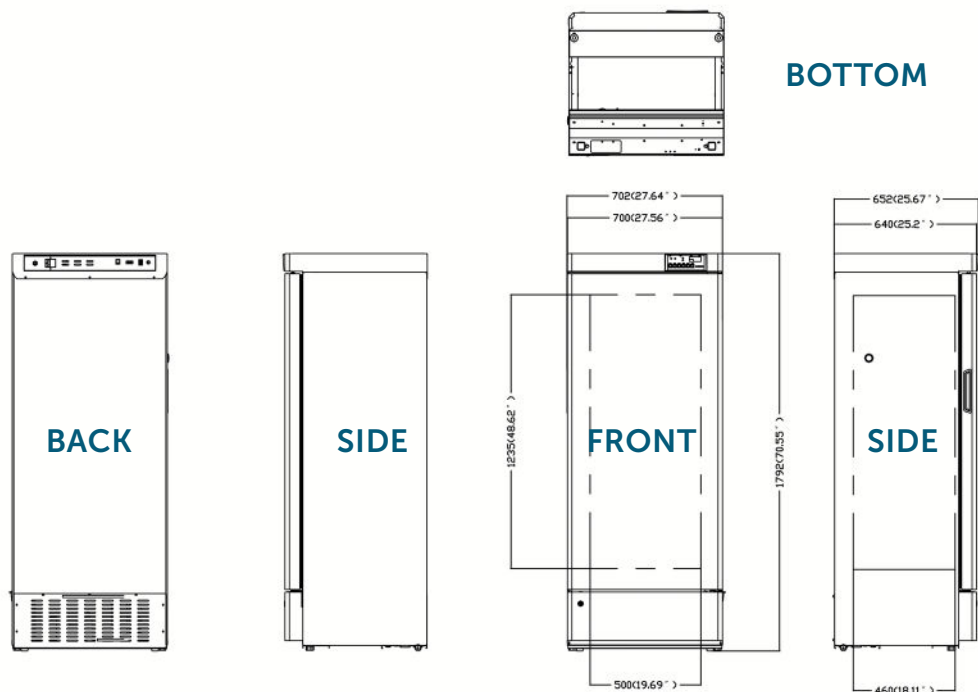

Stirling Ultracold 6000 Poston Road, Athens, Ohio 45701, USA
T 740.274.7900 / 1.855.274.7900 | F 740.274.7901 | www.stirlingultracold.com

©2024 Stirling Ultracold, Global Cooling, Inc. All Rights Reserved.

Global Cooling technology is manufactured under U.S. and International patents.
Stirling Ultracold is a trademark of Global Cooling, Inc. Specifications subject to
change without notice. Refer to www.stirlingultracold.com for the latest specifications.



REDEFINING COLD